

View in action



"Suitable for quick re-palletting between different environments"




Specifications

Category	Lifting Tool		
Handling needs	Lift and tip rolls		
Core material	Thick paper and soft plastic		
Core dimensions	3" (76 mm) or 6" (152 mm)		
Core dimension tolerance	±3 mm		
Core adaptation >3 mm	Spacer plates		
RTC adapter	Available		
Tilting capacity	Roll	Ideal	Max
	Weight	100 kg	200 kg
	Width	600 mm	1200 mm
	Diameter	600 mm	1200 mm
Swivel capacity (degrees)	30°		
Tilting capacity (degrees)	90°		
Control	Manual		
Material	Stainless Steel		
Overload alarm	No		
IP protection	65		
Weight	18		
Lifter Compatibility	All		
Tool dimensions (mm)	Length	Width	Height
	780	150	580

Optional Accessories

RTC Adapter
Tooth plate ø76 mm - with 4 sets of screw fasteners
Tooth plate ø152 mm - with 4 sets of screw fasteners
Spacer plate 3 mm (not compatible with screw fasteners)
Anti-telescoping safety up to ø600 mm

Expander position (Gripper)

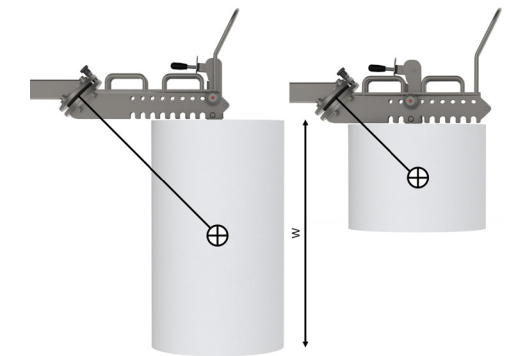

Manual Roll Manipulator

The MRM is a roll turner designed to grip and rotate easier rolls, recommended for quick and safe lifting, transportation, and tipping of rolls up to 200 kg. The equipment is manually operated from vertical to horizontal position.

Robust construction

MRM is constructed from stainless steel, making it ideal for use in demanding industrial environments.

Can be adapted to various core sizes

The standard MRM has a tolerance of ±3 mm, which can be further adjusted with intermediate plates or additional gripping teeth for variations.

Flexible gripping/turning positions

It is quick and easy to set the expander for an optimal center of gravity, and the large handle allows the roll to be rotated from any position.

Swivel unit for easy positioning

The MRM's swivel unit at the back makes it easy to position the expander or roll on a spindle. The maximum angle is adjustable with two screws (longer screws provide less angle).

Features

- For industrial use in demanding environments
- Hygienic version for food and cleanroom
- Manually operated gripping and tipping function
- Swing unit at the back, manual operation
- For cores made of thick paper or soft plastic
- Adaptation to different core sizes (additional purchase)
- Easy lock in the middle position for safe transport
- Option to add anti-telescoping safety
- Can be mounted on any 2LIFT Lifter with suitable lifting capacity

